


Fingerprint Lock Instructions BFF-2407

1. Panel lock box dimension drawing:

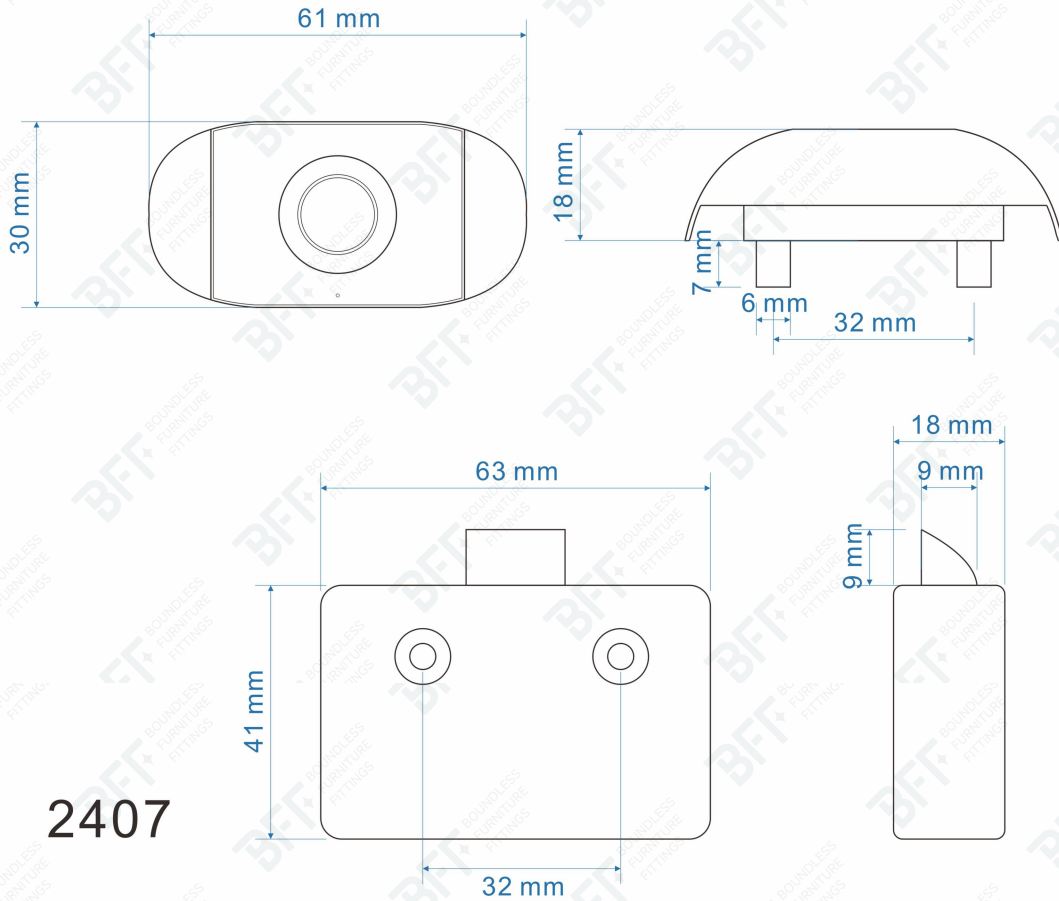

2. Product Specifications:

Rechargeable model, lithium battery standard voltage 3.7V, standby current $\leq 12\mu\text{A}$, maximum instantaneous current $\leq 800\text{mA}$, alarm voltage 3.0V with a tolerance of $\pm 0.2\text{V}$.

3. Operating Instructions:

1) Unlock

- (1) In initial state, any fingerprint can unlock the lock.
- (2) After enrollment, only registered fingerprints work. The lock relocks automatically 4 seconds after unlocking.

2) Fingerprint Enrollment

- (1) Press and hold any fingerprint for 8 seconds until green light flashes once and blue light stays on, then release.

(2) With blue light on, press the sensor area 8 times. Green light + long beep = success.

(3) Add more fingerprints while blue light is on, max 10 fingerprints.

3) Add More Fingerprints

Activate steady blue light with a registered fingerprint, press new fingerprint 8 times. Green light + long beep = success.

4) System Reset

Method 1: Hold valid fingerprint about 18 seconds. Keep holding when green/color lights on. Release at red light to clear all fingerprints.

Method 2: Insert electronic key, touch the sensor. Green light for 2s, lock opens, reset done.

5) Power Supply & Emergency:

Built-in rechargeable lithium battery. When the battery is completely drained, you can connect a power bank or a phone charger via the Type-C port for emergency power supply to unlock the drawer.

Charging Indicator: During charging, the indicator light on the battery typically shows red; when fully charged, it turns blue or green.